

Kopplungs- und Entkopplungs-Netzwerk *Coupling Decoupling Network*


Beschreibung:

Das CDN T2 ist ein Teil der CDN Serie von Kopplungs- Entkopplungs- Netzwerken zur leitungsgeführten Immunitätsmessung an Produkten nach IEC 61000-4-6. Das CDN T2 entspricht den Vorgaben aus IEC 61000-4-6 Annex D5 und eignet sich für Störfestigkeitsprüfungen an einem symmetrischen Leitungspaar mit kleinen Betriebsströmen (z.B. Telefon-, CAN- und Audoleitungen). Der Frequenzbereich ist bis 10 kHz hinab erweitert.

Description:

The CDN T2 is part of the coupling decoupling network series for conducted common mode immunity testing according to IEC 61000-4-6. The CDN T2 is compliant to IEC 61000-4-6 Annex D5 and is suitable for immunity testing on unscreened and unbalanced control lines with moderate currents (e.g. Phone, CAN and audio lines). The CDN T2 features an extended frequency range down to 10 kHz.

Technische Daten:		Specifications:
Frequenzbereich:	10 kHz ... 230 MHz	Frequency range:
Gleichtaktimpedanz:	10 kHz – 24 MHz: 150 Ω ±20 Ω 24 MHz – 80 MHz: 150Ω +60Ω / -45 Ω 80 MHz – 230 MHz: 150 Ω ±60	Common mode impedance:
Max. HF-Testspannung (EMK):	30 V	Max. RF-test voltage (emf):
Maximale HF-Eingangsleistung:	6 W (continuous)	RF-input-power:
HF-Anschluss:	50 Ω BNC (female)	RF-input connector:
Spannungsteilungsfaktor HF-Input – EuT-Port:	9.5 dB 10 kHz – 150 kHz: +2 dB / -1 dB 150 kHz – 80 MHz: ±1dB 80 MHz – 300 MHz: +3 dB / - 2 dB	Voltage division factor RF-input – EuT-port:
Lastimpedanz EuT-AE:	>750 Ω (DC – 100 MHz)	Load impedance EuT-AE :
Dämpfung EuT-AE (Z=100 Ω):	<1 dB (DC – 10 MHz) <3dB (10 MHz – 50 MHz)	Attenuation Eut-AE :
Eingangsspannung EuT (AE):	100 VAC / 150 VDC	Input Voltage Eut (AE):
Strombelastbarkeit EuT-AE:	0,1 A, DC	Current rating:
Gehäusematerial:	Aluminium	Housing material:
Gehäuseabmessungen:	216 x 105 x 108 mm	Housing dimensions:
Gewicht:	ca. 1320 g	Weight:
EuT, AE Anschlüsse:	4 mm safety banana jacks	EuT, AE connectors:
Mitgeliefertes Zubehör	CA 2/4	Included accessories:
Kurzschlussbügel 3 polig:	(2 units included by default)	3 pin shorting bar:
Optionales Zubehör:		Optional accessories:
30 mm Abstandsadapter:	SR 30/4	30 mm distance adapter
50 Ω zu 150 Ω Adapter:	SR 100-6W	50 Ω to 150 Ω adapter:

Das CDN T2 ist für Messungen auf einer symmetrischen Leitung vorgesehen. Der Frequenzbereich umfasst 10 kHz bis 230 MHz. Im Bild 7 ist das Prinzipschaltbild gezeigt.

Das CDN T2 erfüllt die Anforderungen der Normen IEC 61000-4-6, IEC 61326 und NAMUR NE 21. Die CDNs werden mit individuellen Prüfprotokollen für die Gleichtaktimpedanz und das Spannungsteilungsmaß ausgeliefert.

Das im CDN verbaute Symmetriernetzwerk weist prinzipbedingt Serienresonanzen auf, die das Nutzsignal belasten. Durch ein spezielles Dämpfungsnetzwerk kann der Einfluss dieser Resonanzen verringert werden. Im Bereich niedriger Frequenzen beträgt die parallele Lastimpedanz mehr als 750Ω (entsprechend <3 dB Dämpfung im 600Ω -System). Typische Werte der Lastimpedanz sind in Bild 4 dargestellt. Im Bereich höherer Frequenzen ist die im CDN verbaute Leitung zu berücksichtigen; diese ist auf 100Ω Systemimpedanz ausgelegt, aber auch für 120Ω -Systeme verwendbar. Die Dämpfung ist in Bild 5 dargestellt. Bild 6 zeigt die Unsymmetriedämpfung.

Zur Überprüfung oder Kalibrierung des Messaufbaus sind diverse optional erhältliche Zubehörteile verfügbar.

Die Erdung zum Messaufbau erfolgt über die leitende Grundplatte des CDNs. Zusätzlich ist auf der AE-Seite ein M4 Schraubanschluss und alternativ eine 4 mm Buchse zur Erdung vorgesehen. Zur Befestigung des CDNs sind vier 6 mm Nuten auf der nicht lackierten Grundplatte vorhanden.

Zur Erhöhung der Betriebssicherheit sind die Anschlüsse als Sicherheitsbuchsen ausgeführt. Es wird empfohlen, für eigene Adapter spezielle 4 mm Sicherheitsstecker zu verwenden. Diese sind optional erhältlich.

The CDN AF2 is intended to inject common mode disturbance signals to control lines in the frequency range 150 kHz to 230 MHz. The circuitry is shown in Fig. 7.

All CDNs comply with the requirements of IEC 61000-4-6, IEC 61326 and NAMUR NE21. Each CDN comes with individually measured data and a calibration certificate for common mode impedance and voltage division factor.

T-series CDN incorporate a balancing network as defined in IEC 61000-4-6 to connect the disturbance source to the common mode point of the balanced line causing load and resonances on the balanced line. These have been reduced by means of an additional damping network, so that the load impedance is greater than 750Ω (Equivalent to 3 dB insertion loss in a 600Ω system) in the low frequency range (see fig. 4). For higher frequencies the transmission line (designed for 100Ω , also usable for 120Ω -systems) needs to be considered. The insertion loss is shown in fig. 5, the LCL is shown in fig. 6.

A variety of calibration adapters and other accessories is available as an option.

The connection to ground can be accomplished using the ground plane of the CDN. Additionally there is a M4 thread located at the AE side to ground as well as a 4 mm socket to connect the device to ground.

To improve the operational safety the connections are carried out as security sockets. We recommend to use special 4 mm security plugs if you plan to design your own adapters. Those connectors can be purchased optionally.

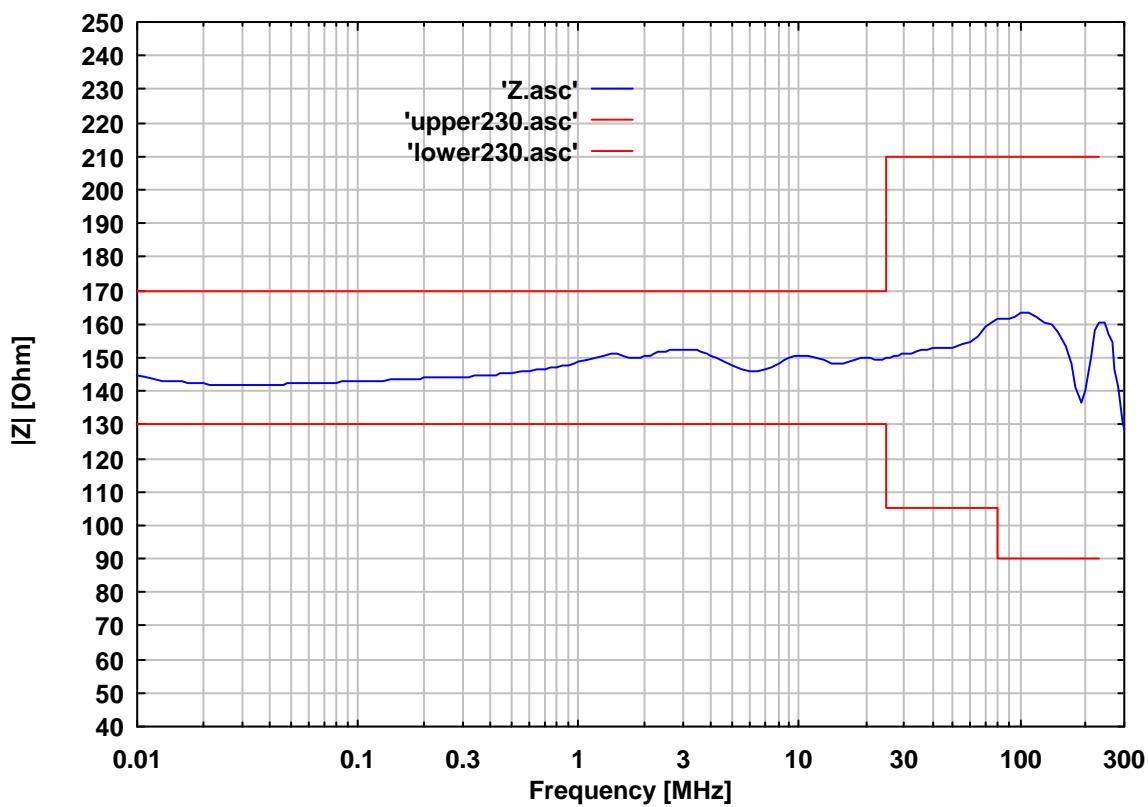


Bild 1: typ. Gleichtakt Impedanz an den Prüflingsklemmen
Fig. 1: typ. EuT common mode impedance

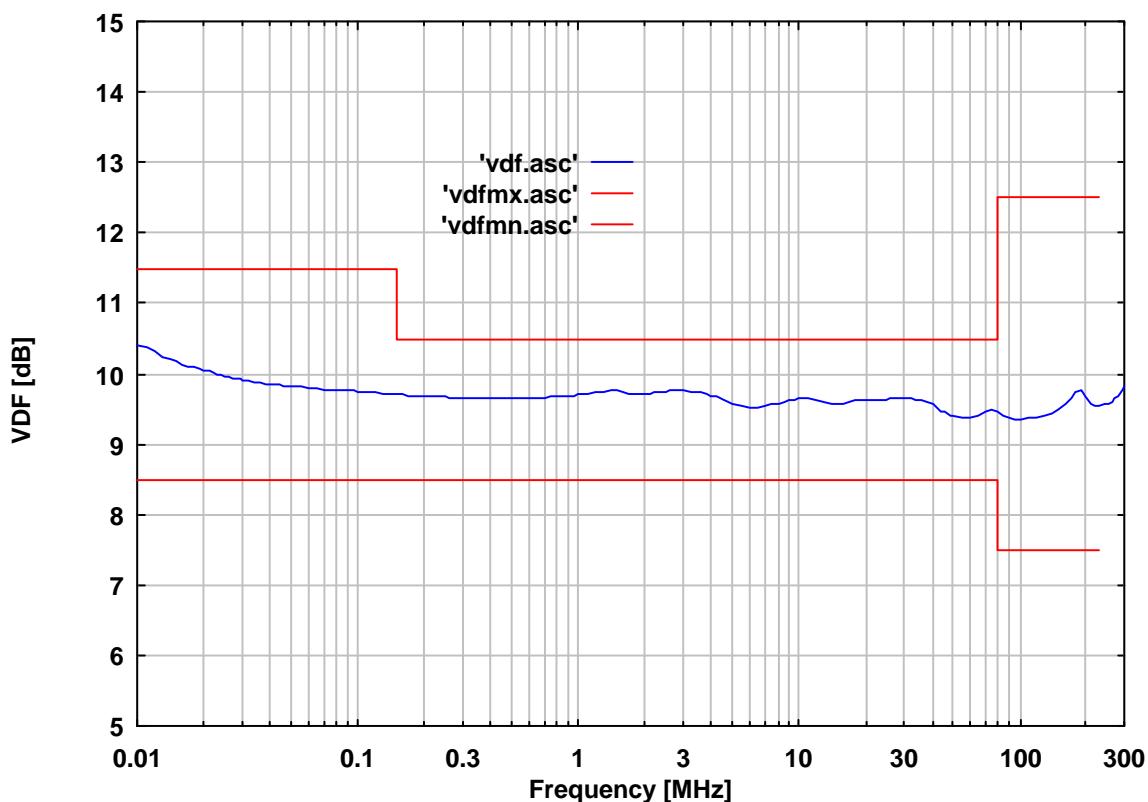


Bild 2: typischer Spannungsteilerfaktor HF-Buchse zu EuT
Fig. 2: typical voltage division factor RF-port to EuT port

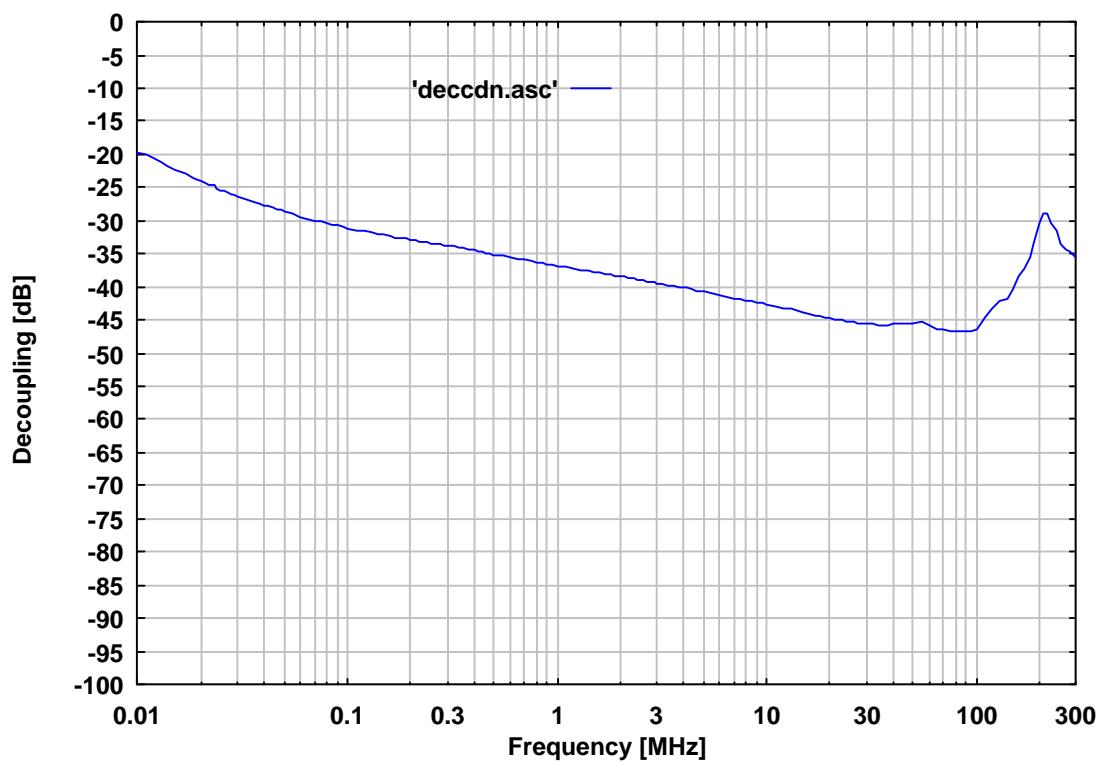


Bild 3: typ. Isolation AE zu HF-Port
Fig. 3: typ. isolation AE to RF-port

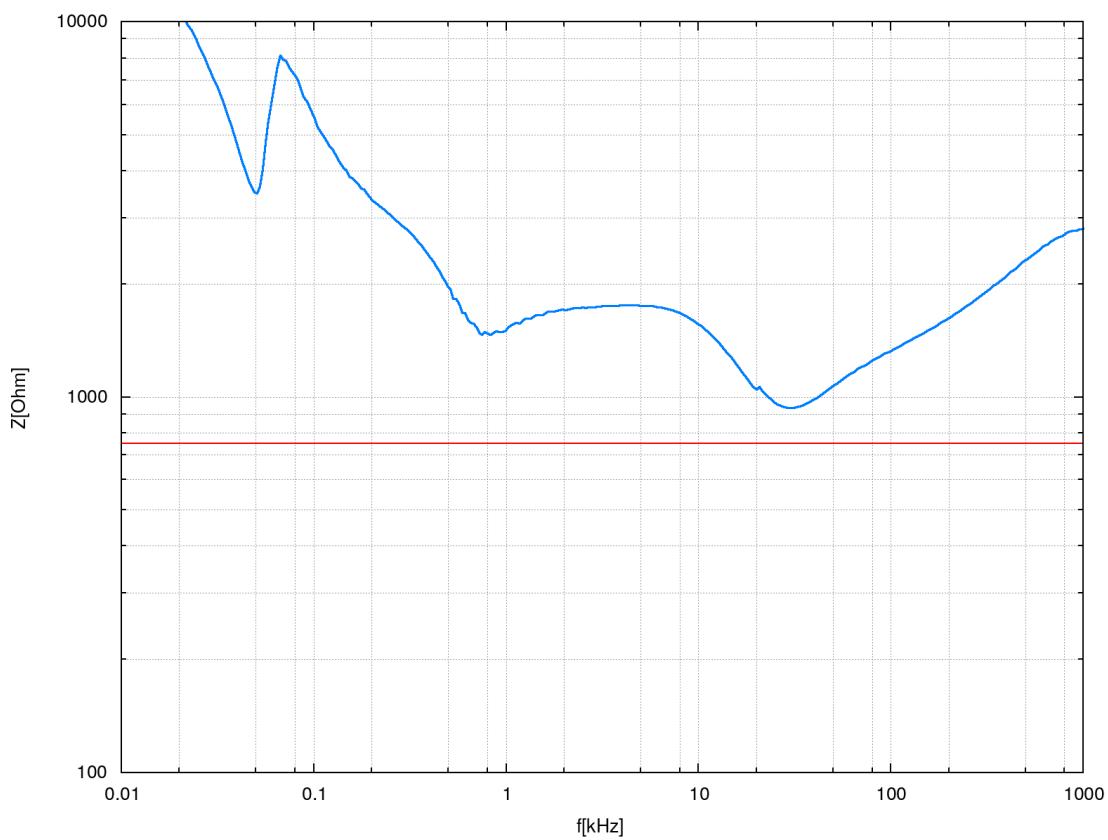


Bild 4: typ. Lastimpedanz (Differentiell)
Fig. 4: typ. load impedance (differential)

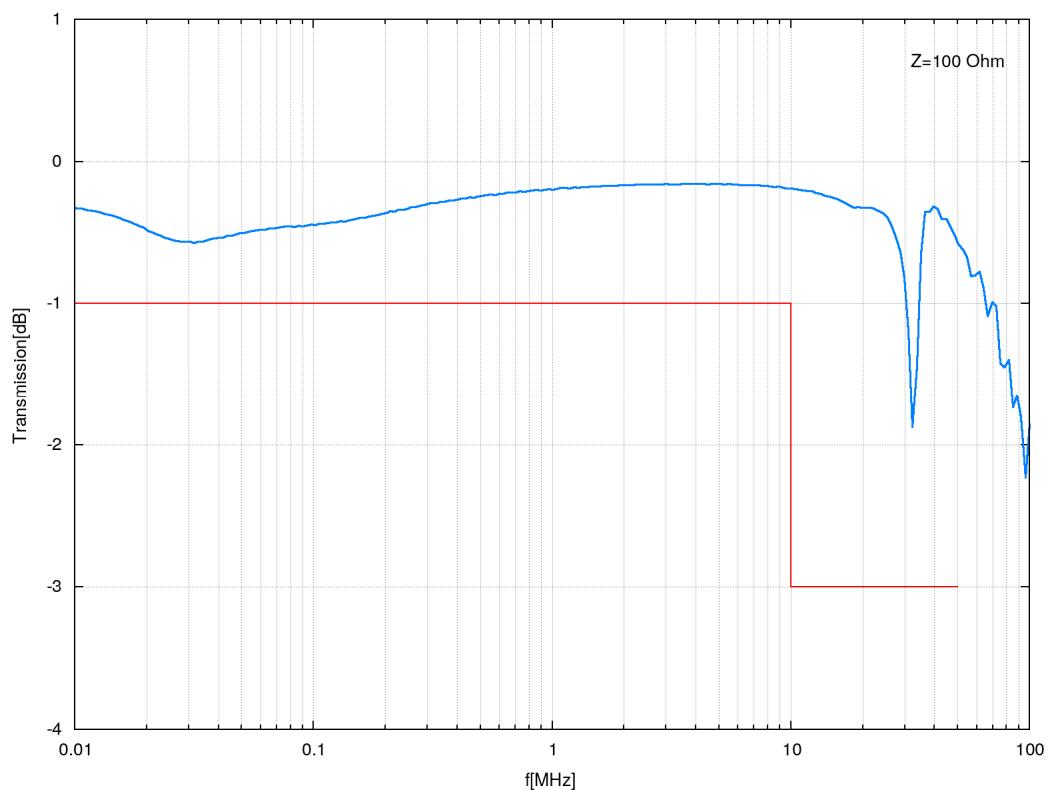


Bild 5: typ. Transmission AE zu EuT (differential)
Fig. 5: typ. transmission AE – EuT(differential)

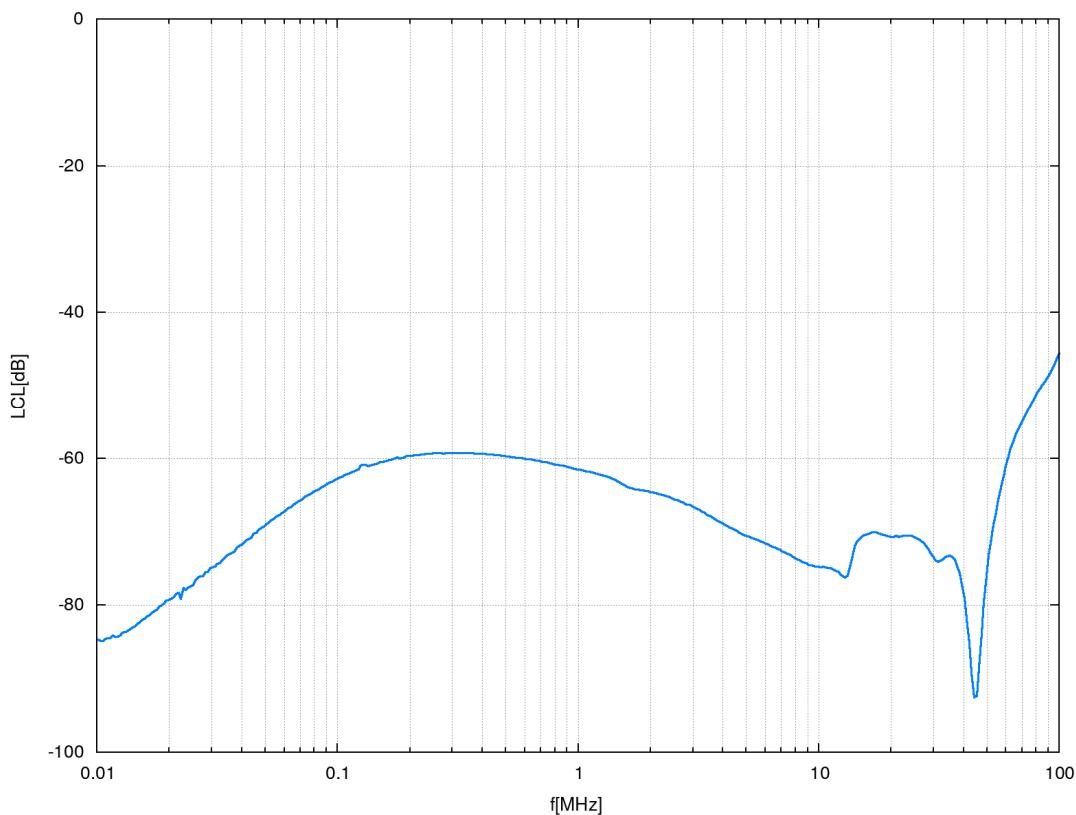


Bild 6: typische Unsymmetriedämpfung
Fig. 6: typ. longitudinal conversion loss

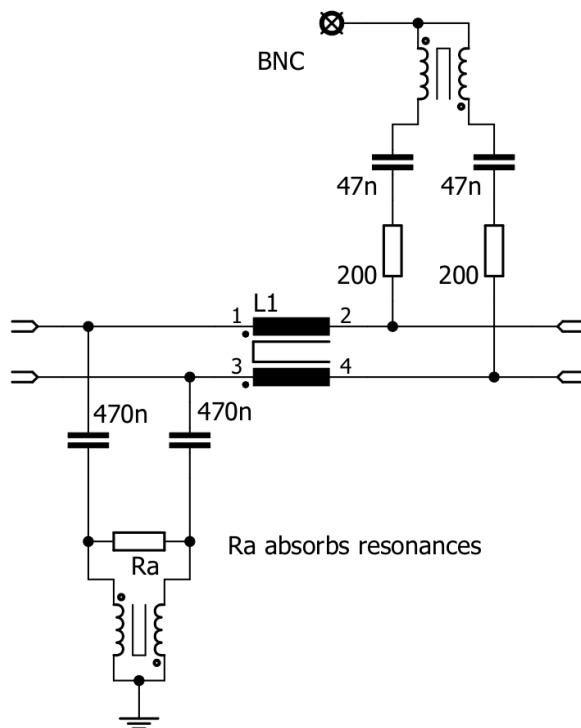


Bild 7: Prinzipschaltbild CDN T2
Fig. 7: Circuitry CDN T2

